



AiP74LVC125

Quad Buffer/Line Driver; 3-state

Product Specification

Specification Revision History:

Version	Date	Description
2017-05-A1	2017-05	New
2023-04-B1	2023-04	Update the template
2025-05-B2	2025-05	Add VQFN14 package form
2025-12-B3	2025-12	Modify the supply voltage range; add the parameters at the condition of $V_{CC}=4.5V$ to $5.5V$; add ESD
2026-05-B4	2026-05	Add DHVQFN14 package form



Contents

1、General Description.....	3
2、Block Diagram And Pin Description	5
2.1、Block Diagram	5
2.2、Pin Configuration	6
2.3、Pin Description.....	7
2.4、Function Table.....	7
3、Electrical Parameter	8
3.1、Absolute Maximum Ratings.....	8
3.2、Recommended Operating Conditions.....	8
3.3、Electrical Characteristics.....	9
3.3.1、DC Characteristics 1	9
3.3.2、DC Characteristics 2	10
3.3.3、AC Characteristics 1	11
3.3.4、AC Characteristics 2	12
4、Testing Circuit	13
4.1、AC Testing Circuit	13
4.2、AC Testing Waveforms.....	13
4.3、Measurement Points	14
4.4、Test Data	14
5、Package Information	15
5.1、DIP14	15
5.2、SOP14	16
5.3、TSSOP14.....	17
5.4、VQFN14.....	18
5.5、DHVQFN14.....	19
6、Statements And Notes	20
6.1、The name and content of Hazardous substances or Elements in the product	20
6.2、Notes	20



1、General Description

The AiP74LVC125 consists of four non-inverting buffers/line drivers with 3-state outputs (nY) that are controlled by the output enable input ($\overline{\text{nOE}}$). A HIGH at $\overline{\text{nOE}}$ causes the outputs to assume a high-impedance OFF-state.

Inputs can be driven from either 3.3V or 5V devices. When disabled, up to 5.5V can be applied to the outputs.

Features:

- 5V tolerant inputs/outputs for interfacing with 5V logic
- Wide supply voltage range from 1.2V to 5.5V
- CMOS low power consumption
- Direct interface with TTL levels
- Specified from -40°C to +125°C
- Packaging information: DIP14/SOP14/TSSOP14/VQFN14/DHVQFN14

**Ordering Information:****Tube packing specifications:**

Part number	Packaging form	Marking code	Tube quantity	Boxed tube quantity	Boxed quantity	Notes
AiP74LVC125DA14.TB	DIP14	74LVC125	25 PCS/tube	40 tube/box	1000 PCS/box	Dimensions of plastic enclosure: 19.0mm×6.4mm Pin spacing: 2.54mm
AiP74LVC125SA14.TB	SOP14	74LVC125	50 PCS/tube	200 tube/box	10000 PCS/box	Dimensions of plastic enclosure: 8.7mm×3.9mm Pin spacing: 1.27mm
AiP74LVC125TA14.TB	TSSOP14	74LVC125	96 PCS/tube	200 tube/box	19200 PCS/box	Dimensions of plastic enclosure: 5.0mm×4.4mm Pin spacing: 0.65mm

Reel packing specifications:

Part number	Packaging form	Marking code	Reel quantity	Boxed reel quantity	Notes
AiP74LVC125SA14.TR	SOP14	74LVC125	4000 PCS/reel	8000 PCS/box	Dimensions of plastic enclosure: 8.7mm×3.9mm Pin spacing: 1.27mm
AiP74LVC125TA14.TR	TSSOP14	74LVC125	5000 PCS/reel	10000 PCS/box	Dimensions of plastic enclosure: 5.0mm×4.4mm Pin spacing: 0.65mm
AiP74LVC125QK14.TR	VQFN14	74LVC125	5000 PCS/reel	10000 PCS/box	Dimensions of plastic enclosure: 3.5mm×3.5mm 3in spacing: 0.50mm
AiP74LVC125QE14.TR	DHVQFN14	LVC125	3000 PCS/reel	3000 PCS/box	Dimensions of plastic enclosure: 3.0mm×2.5mm 3in spacing: 0.50mm

Note: If the physical information is inconsistent with the ordering information, please refer to the actual product.



2、Block Diagram And Pin Description

2.1、Block Diagram

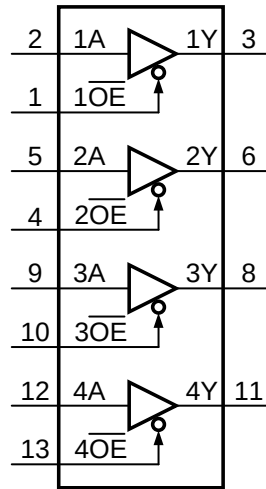


Figure 1. Logic symbol

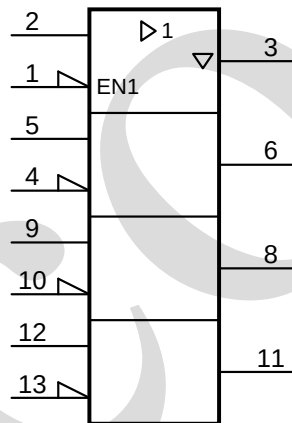


Figure 2. IEC logic symbol



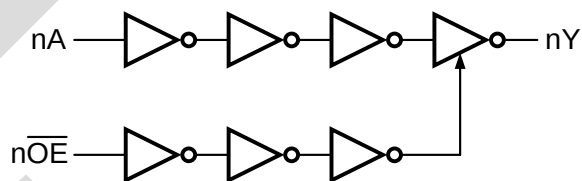


Figure 3. Logic diagram

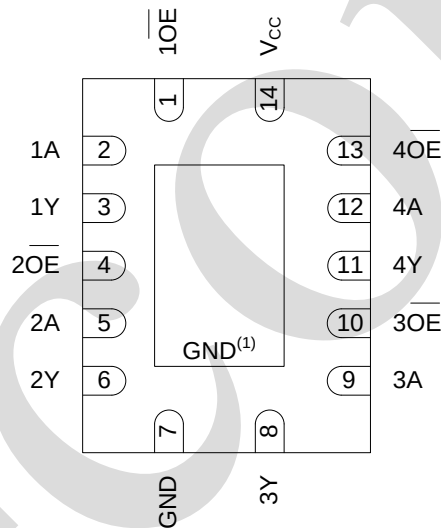

2.2、Pin Configuration

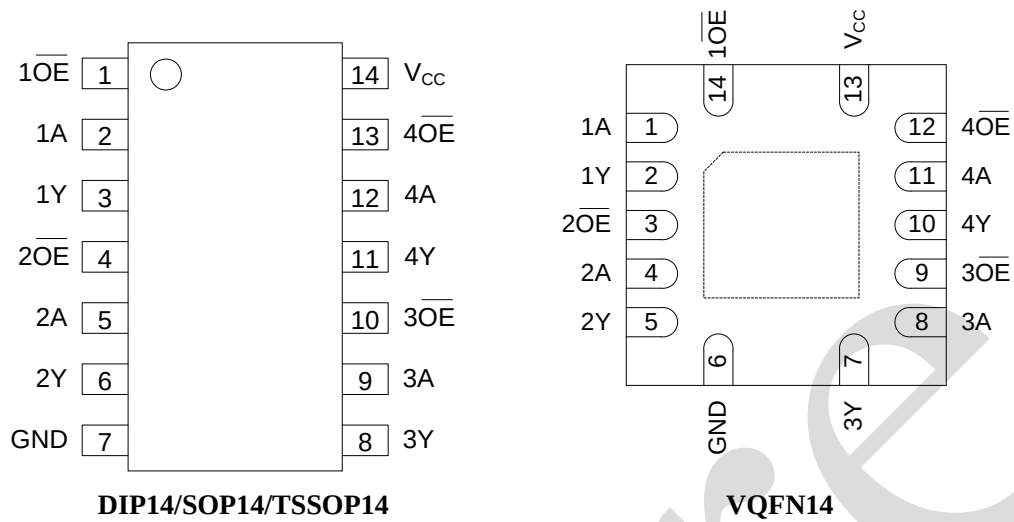

Note: (1) If it is soldered, the solder land should remain floating or be connected to GND.



2.3、Pin Description

Pin No.		Pin Name	Description
DIP14/SOP14/TSSOP14/DHVQFN14	VQFN14		
1	14	$\overline{1OE}$	data enable input (active LOW)
2	1	1A	data input
3	2	1Y	data output
4	3	$\overline{2OE}$	data enable input (active LOW)
5	4	2A	data input
6	5	2Y	data output
7	6	GND	ground (0V)
8	7	3Y	data output
9	8	3A	data input
10	9	$\overline{3OE}$	data enable input (active LOW)
11	10	4Y	data output
12	11	4A	data input
13	12	$\overline{4OE}$	data enable input (active LOW)
14	13	V _{CC}	supply voltage

2.4、Function Table

Input		Output
$\overline{nOE}$	nA	nY
L	L	L
L	H	H
H	X	Z

Note: H=HIGH voltage level; L=LOW voltage level; X=don't care; Z=high-impedance OFF-state.



3、Electrical Parameter

3.1、Absolute Maximum Ratings

(Voltages are referenced to GND(ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Max.	Unit
supply voltage	V _{CC}	-		-0.5	+6.5	V
input clamping current	I _{IK}	V _I < 0V		-50	-	mA
input voltage	V _I	-		-0.5	+6.5	V
output clamping current	I _{OK}	V _O > V _{CC} or V _O < 0V		-	±50	mA
output voltage	V _O	output HIGH or LOW-state		-0.5	V _{CC} +0.5	V
		output 3-state		-0.5	+6.5	V
output current	I _O	V _O =0V to V _{CC}		-	±50	mA
supply current	I _{CC}	-		-	100	mA
ground current	I _{GND}	-		-100	-	mA
total power dissipation	P _{tot}	-		-	500	mW
storage temperature	T _{stg}	-		-65	+150	°C
soldering Temperature	T _L	10s	DIP	245		°C
			SOP/TSSOP/VQFN/DHVQFN	260		°C
electrostatic discharge	ESD	HBM		2000		V

3.2、Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
supply voltage	V_{CC}	-	1.65	-	5.5	V
		functional	1.2	-	-	V
input voltage	V_I	-	0	-	5.5	V
output voltage	V_O	output HIGH or LOW-state	0	-	V_{CC}	V
		output 3-state	0	-	5.5	V
ambient temperature	T_{amb}	-	-40	-	+125	°C
input transition rise and fall rate	$\Delta t/\Delta V$	$V_{CC}=2.3V$ to $2.7V$	0	-	20	ns/V
		$V_{CC}=2.7V$ to $3.6V$	0	-	10	ns/V



3.3、Electrical Characteristics

3.3.1、DC Characteristics 1

($T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
HIGH-level input voltage	V_{IH}	$V_{CC}=1.2\text{V}$		1.08	-	-	V
		$V_{CC}=1.65\text{V to }1.95\text{V}$		$0.65 \times V_{CC}$	-	-	V
		$V_{CC}=2.3\text{V to }2.7\text{V}$		1.7	-	-	V
		$V_{CC}=2.7\text{V to }3.6\text{V}$		2.0	-	-	V
		$V_{CC}=4.5\text{V to }5.5\text{V}$		$0.7 \times V_{CC}$	-	-	V
LOW-level input voltage	V_{IL}	$V_{CC}=1.2\text{V}$		-	-	0.12	V
		$V_{CC}=1.65\text{V to }1.95\text{V}$		-	-	$0.35 \times V_{CC}$	V
		$V_{CC}=2.3\text{V to }2.7\text{V}$		-	-	0.7	V
		$V_{CC}=2.7\text{V to }3.6\text{V}$		-	-	0.8	V
		$V_{CC}=4.5\text{V to }5.5\text{V}$		-	-	$0.3 \times V_{CC}$	V
HIGH-level output voltage	V_{OH}	$V_I = V_{IH} \text{ or } V_{IL}$	$I_O = -100\mu\text{A}; V_{CC}=1.65\text{V to }5.5\text{V}$	$V_{CC} - 0.2$	-	-	V
			$I_O = -4\text{mA}; V_{CC}=1.65\text{V}$	1.2	-	-	V
			$I_O = -8\text{mA}; V_{CC}=2.3\text{V}$	1.8	-	-	V
			$I_O = -12\text{mA}; V_{CC}=2.7\text{V}$	2.2	-	-	V
			$I_O = -18\text{mA}; V_{CC}=3.0\text{V}$	2.4	-	-	V
			$I_O = -24\text{mA}; V_{CC}=3.0\text{V}$	2.2	-	-	V
			$I_O = -32\text{mA}; V_{CC}=4.5\text{V}$	3.8	-	-	V
LOW-level output voltage	V_{OL}	$V_I = V_{IH} \text{ or } V_{IL}$	$I_O = 100\mu\text{A}; V_{CC}=1.65\text{V to }5.5\text{V}$	-	-	0.2	V
			$I_O = 4\text{mA}; V_{CC}=1.65\text{V}$	-	-	0.45	V
			$I_O = 8\text{mA}; V_{CC}=2.3\text{V}$	-	-	0.6	V
			$I_O = 12\text{mA}; V_{CC}=2.7\text{V}$	-	-	0.4	V
			$I_O = 24\text{mA}; V_{CC}=3.0\text{V}$	-	-	0.55	V
			$I_O = 32\text{mA}; V_{CC}=4.5\text{V}$	-	-	0.55	V
input leakage current	I_I	$V_I = 5.5\text{V or GND}; V_{CC}=3.6\text{V}$		-	-	± 5	μA
OFF-state output current	I_{OZ}	$V_I = V_{IH} \text{ or } V_{IL}; V_O = 5.5\text{V or GND}; V_{CC}=3.6\text{V}$		-	-	± 5	μA
power-off leakage current	I_{OFF}	$V_I \text{ or } V_O = 5.5\text{V}; V_{CC}=0\text{V}$		-	-	± 10	μA
supply current	I_{CC}	$V_I = V_{CC} \text{ or GND}; I_O = 0\text{A}; V_{CC}=3.6\text{V}$		-	-	10	μA
additional supply current	ΔI_{CC}	per input pin; $V_I = V_{CC} - 0.6\text{V}; I_O = 0\text{A}; V_{CC}=2.7\text{V to }3.6\text{V}$		-	-	500	μA
input capacitance	C_I	$V_{CC}=0\text{V to }3.6\text{V}; V_I = \text{GND to } V_{CC}$		-	4.0	-	pF

Note: All typical values are measured at $V_{CC}=3.3\text{V}$ (unless stated otherwise) and $T_{amb}=25^{\circ}\text{C}$.



3.3.2、DC Characteristics 2

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
HIGH-level input voltage	V_{IH}	$V_{CC}=1.2\text{V}$	1.08	-	-	V
		$V_{CC}=1.65\text{V}$ to 1.95V	$0.65 \times V_{CC}$	-	-	V
		$V_{CC}=2.3\text{V}$ to 2.7V	1.7	-	-	V
		$V_{CC}=2.7\text{V}$ to 3.6V	2.0	-	-	V
		$V_{CC}=4.5\text{V}$ to 5.5V	$0.7 \times V_{CC}$	-	-	V
LOW-level input voltage	V_{IL}	$V_{CC}=1.2\text{V}$	-	-	0.12	V
		$V_{CC}=1.65\text{V}$ to 1.95V	-	-	$0.35 \times V_{CC}$	V
		$V_{CC}=2.3\text{V}$ to 2.7V	-	-	0.7	V
		$V_{CC}=2.7\text{V}$ to 3.6V	-	-	0.8	V
		$V_{CC}=4.5\text{V}$ to 5.5V	-	-	$0.3 \times V_{CC}$	V
HIGH-level output voltage	V_{OH}	$V_I = V_{IH} \text{ or } V_{IL}$	$I_O = -100\mu\text{A}; V_{CC}=1.65\text{V}$ to 5.5V	$V_{CC} - 0.3$	-	V
			$I_O = -4\text{mA}; V_{CC}=1.65\text{V}$	1.05	-	V
			$I_O = -8\text{mA}; V_{CC}=2.3\text{V}$	1.65	-	V
			$I_O = -12\text{mA}; V_{CC}=2.7\text{V}$	2.05	-	V
			$I_O = -18\text{mA}; V_{CC}=3.0\text{V}$	2.25	-	V
			$I_O = -24\text{mA}; V_{CC}=3.0\text{V}$	2.0	-	V
			$I_O = -32\text{mA}; V_{CC}=4.5\text{V}$	3.4	-	V
LOW-level output voltage	V_{OL}	$V_I = V_{IH} \text{ or } V_{IL}$	$I_O = 100\mu\text{A}; V_{CC}=1.65\text{V}$ to 5.5V	-	-	0.3
			$I_O = 4\text{mA}; V_{CC}=1.65\text{V}$	-	-	0.65
			$I_O = 8\text{mA}; V_{CC}=2.3\text{V}$	-	-	0.8
			$I_O = 12\text{mA}; V_{CC}=2.7\text{V}$	-	-	0.6
			$I_O = 24\text{mA}; V_{CC}=3.0\text{V}$	-	-	0.8
			$I_O = 32\text{mA}; V_{CC}=4.5\text{V}$	-	-	0.8
input leakage current	I_I	$V_I = 5.5\text{V}$ or GND; $V_{CC}=3.6\text{V}$	-	-	± 20	μA
OFF-state output current	I_{OZ}	$V_I = V_{IH} \text{ or } V_{IL}; V_O = 5.5\text{V}$ or GND; $V_{CC}=3.6\text{V}$	-	-	± 20	μA
power-off leakage current	I_{OFF}	$V_I \text{ or } V_O = 5.5\text{V}; V_{CC}=0\text{V}$	-	-	± 20	μA
supply current	I_{CC}	$V_I = V_{CC}$ or GND; $I_O = 0\text{A}; V_{CC}=3.6\text{V}$	-	-	40	μA
additional supply current	ΔI_{CC}	per input pin; $V_I = V_{CC} - 0.6\text{V}; I_O = 0\text{A}; V_{CC}=2.7\text{V}$ to 3.6V	-	-	5000	μA

Note: All typical values are measured at $V_{CC}=3.3\text{V}$ (unless stated otherwise) and $T_{amb}=25^{\circ}\text{C}$.



3.3.3、AC Characteristics 1

($T_{amb}=-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
nA, to nY propagation delay	t_{pd}	see Figure 5	$V_{CC}=1.2\text{V}$	-	12.0	ns
			$V_{CC}=1.65\text{V}$ to 1.95V	1.5	5.4	ns
			$V_{CC}=2.3\text{V}$ to 2.7V	1.0	2.9	ns
			$V_{CC}=2.7\text{V}$	1.5	2.8	ns
			$V_{CC}=3.0\text{V}$ to 3.6V	1.0	2.5	ns
			$V_{CC}=4.5\text{V}$ to 5.5V	1.0	2.2	ns
$\overline{\text{nOE}}$ to nY enable time	t_{en}	see Figure 6	$V_{CC}=1.2\text{V}$	-	16.0	ns
			$V_{CC}=1.65\text{V}$ to 1.95V	1.0	5.0	ns
			$V_{CC}=2.3\text{V}$ to 2.7V	0.5	2.9	ns
			$V_{CC}=2.7\text{V}$	1.5	3.1	ns
			$V_{CC}=3.0\text{V}$ to 3.6V	1.0	2.3	ns
			$V_{CC}=4.5\text{V}$ to 5.5V	1.0	2.0	ns
$\overline{\text{nOE}}$ to nY disable time	t_{dis}	see Figure 6	$V_{CC}=1.2\text{V}$	-	7.0	ns
			$V_{CC}=1.65\text{V}$ to 1.95V	2.2	4.6	ns
			$V_{CC}=2.3\text{V}$ to 2.7V	0.5	2.6	ns
			$V_{CC}=2.7\text{V}$	1.5	3.1	ns
			$V_{CC}=3.0\text{V}$ to 3.6V	1.0	3.2	ns
			$V_{CC}=4.5\text{V}$ to 5.5V	1.0	2.8	ns
output skew time	$t_{sk(o)}$	$V_{CC}=3.0\text{V}$ to 3.6V	-	-	1.0	ns
Power dissipation capacitance	C_{PD}	per buffer; $V_I=\text{GND}$ to V_{CC}	$V_{CC}=1.65\text{V}$ to 1.95V	-	6.0	pF
			$V_{CC}=2.3\text{V}$ to 2.7V	-	9.4	pF
			$V_{CC}=3.0\text{V}$ to 3.6V	-	12.4	pF

Note:

[1] Typical values are measured at $T_{amb}=25^{\circ}\text{C}$ and $V_{CC}=1.2\text{V}$, 1.8V , 2.5V , 2.7V and 3.3V respectively.

[2] t_{pd} is the same as t_{PLH} and t_{PHL} .

t_{en} is the same as t_{PZH} and t_{PZL} .

t_{dis} is the same as t_{PLZ} and t_{PHZ} .

[3] Skew between any two outputs of the same package switching in the same direction. This parameter is guaranteed by design.

[4] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$P_D=(C_{PD}\times V_{CC}^2\times f_i\times N)+\sum(C_L\times V_{CC}^2\times f_o)$ where:

f_i =input frequency in MHz;

f_o =output frequency in MHz;

C_L =output load capacitance in pF;

V_{CC} =supply voltage in V;

N =number of inputs switching;

$\sum(C_L\times V_{CC}^2\times f_o)$ =sum of outputs.



3.3.4、AC Characteristics 2

($T_{amb}=-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
nA, to nY propagation delay	t _{pd}	see Figure 5	V _{CC} =1.65V to 1.95V	1.5	-	12.8	ns
			V _{CC} =2.3V to 2.7V	1.0	-	6.7	ns
			V _{CC} =2.7V	1.5	-	7.0	ns
			V _{CC} =3.0V to 3.6V	1.0	-	6.0	ns
			V _{CC} =4.5V to 5.5V	1.0	-	5.2	ns
$\overline{\text{nOE}}$ to nY enable time	t _{en}	see Figure 6	V _{CC} =1.65V to 1.95V	1.0	-	14.2	ns
			V _{CC} =2.3V to 2.7V	0.5	-	7.9	ns
			V _{CC} =2.7V	1.5	-	8.5	ns
			V _{CC} =3.0V to 3.6V	1.0	-	7.0	ns
			V _{CC} =4.5V to 5.5V	1.0	-	6.1	ns
$\overline{\text{nOE}}$ to nY disable time	t _{dis}	see Figure 6	V _{CC} =1.65V to 1.95V	2.2	-	8.7	ns
			V _{CC} =2.3V to 2.7V	0.5	-	5.0	ns
			V _{CC} =2.7V	1.5	-	6.5	ns
			V _{CC} =3.0V to 3.6V	1.0	-	6.0	ns
			V _{CC} =4.5V to 5.5V	1.0	-	5.2	ns
output skew time	t _{sk(o)}	V _{CC} =3.0V to 3.6V		-	-	1.5	ns

Note:

[1] Typical values are measured at $T_{amb}=25^{\circ}\text{C}$ and $V_{CC}=1.2\text{V}$, 1.8V , 2.5V , 2.7V and 3.3V respectively.

[2] t_{pd} is the same as t_{PLH} and t_{PHL} .

t_{en} is the same as t_{PZH} and t_{PZL} .

t_{dis} is the same as t_{PLZ} and t_{PHZ} .

[3] Skew between any two outputs of the same package switching in the same direction. This parameter is guaranteed by design.



4、Testing Circuit

4.1、AC Testing Circuit

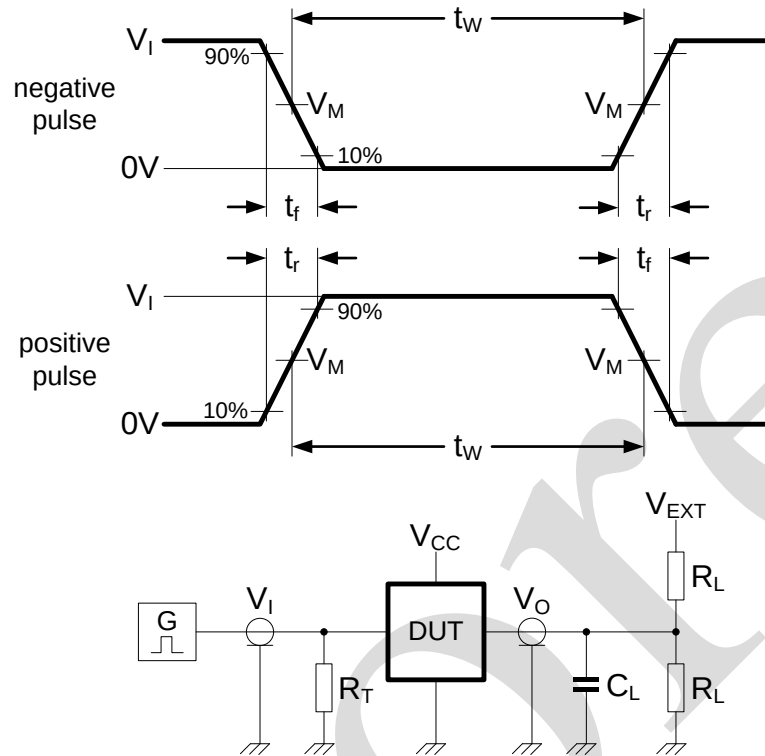


Figure 4. Test circuit for measuring switching times

Definitions for test circuit:

R_L =Load resistance.

C_L =Load capacitance including jig and probe capacitance.

R_T =Termination resistance should be equal to the output impedance Z_o of the pulse generator.

V_{EXT} =External voltage for measuring switching times.

4.2、AC Testing Waveforms

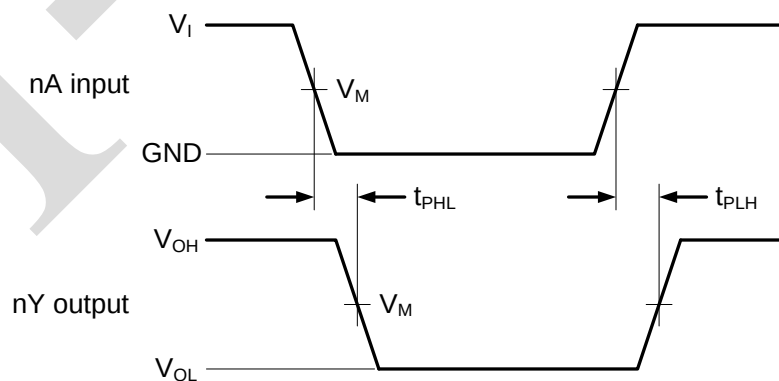


Figure 5. The input (nA) to output (nY) propagation delays

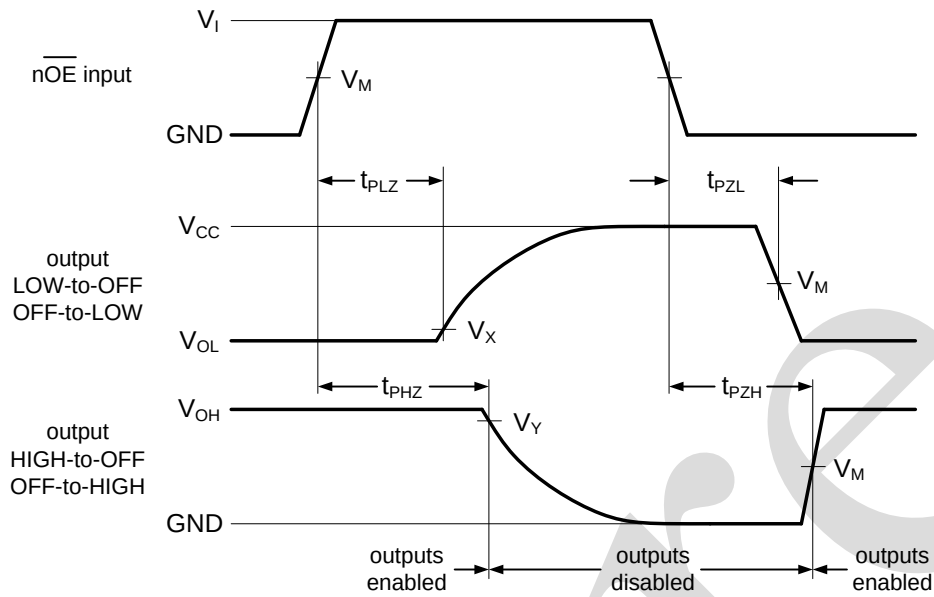


Figure 6. 3-state enable and disable times

4.3、Measurement Points

Supply voltage	Input		Output
V_{CC}	V_I	V_M	V_M
1.2V	V_{CC}	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
1.65V to 1.95V	V_{CC}	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
2.3V to 2.7V	V_{CC}	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
2.7V	2.7V	1.5V	1.5V
3.0V to 3.6V	2.7V	1.5V	1.5V


4.4、Test Data

Supply voltage	Input		Load		V_{EXT}		
V_{CC}	V_I	t_r, t_f	C_L	R_L	t_{PLH}, t_{PHL}	t_{PZH}, t_{PHZ}	t_{PZL}, t_{PLZ}
1.2V	V_{CC}	$\leq 2.0ns$	30pF	1k Ω	open	GND	$2 \times V_{CC}$
1.65V to 1.95V	V_{CC}	$\leq 2.0ns$	30pF	1k Ω	open	GND	$2 \times V_{CC}$
2.3V to 2.7V	V_{CC}	$\leq 2.0ns$	30pF	500 Ω	open	GND	$2 \times V_{CC}$
2.7V	2.7V	$\leq 2.5ns$	50pF	500 Ω	open	GND	$2 \times V_{CC}$
3.0V to 3.6V	2.7V	$\leq 2.5ns$	50pF	500 Ω	open	GND	$2 \times V_{CC}$



5、Package Information



5.1、DIP14

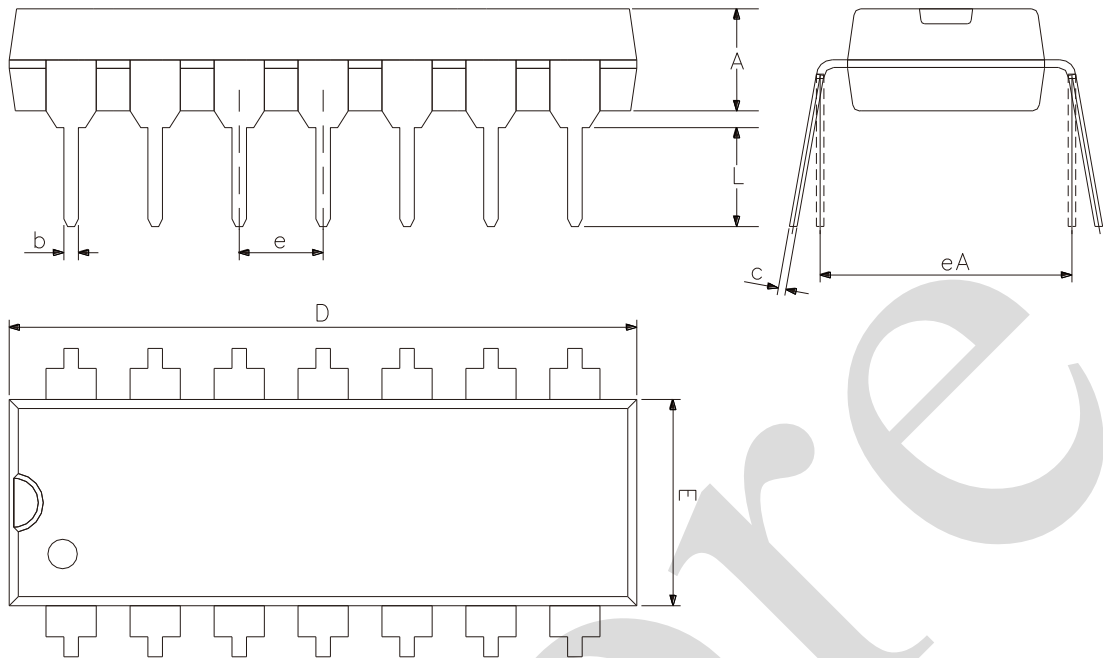

2023/12/A	Dimensions In Millimeters	
Symbol	Min	Max
A	3.05	3.60
b	0.33	0.56
c	0.20	0.36
D	18.80	19.40
E	6.20	6.60
e	2.54	
eA	7.62	10.90
L	2.92	—






5.2、SOP14

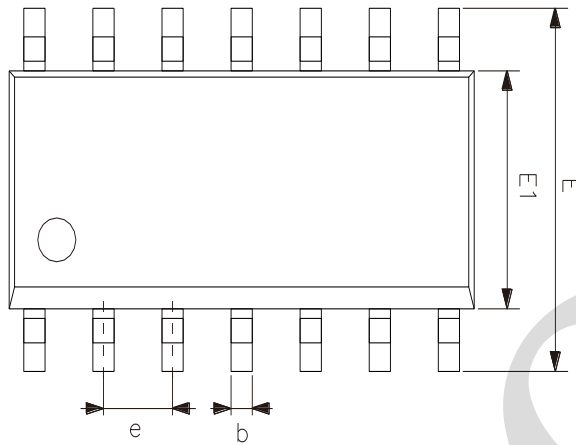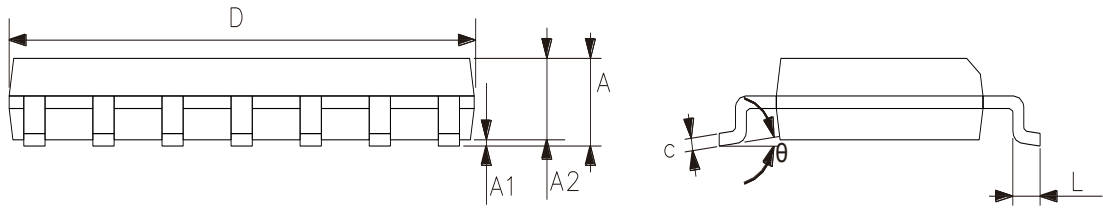

2023/12/A	Dimensions In Millimeters	
Symbol	Min.	Max.
A	1.50	1.75
A1	0.05	0.25
A2	1.30	—
b	0.33	0.50
c	0.19	0.25
D	8.43	8.76
E	5.80	6.25
E1	3.75	4.00
e	1.27	
L	0.40	0.89
θ	0°	8°




5.3、TSSOP14

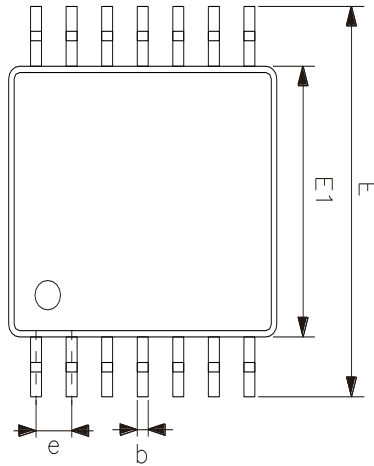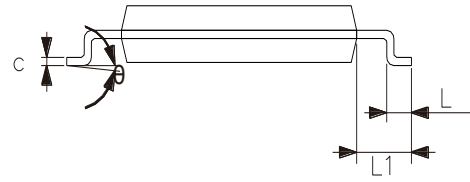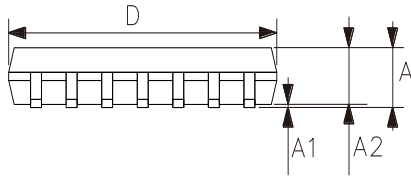


2023/12/A	Dimensions In Millimeters	
Symbol	Min	Max
A	—	1.20
A1	0.05	0.15
A2	0.80	1.05
b	0.19	0.30
c	0.09	0.20
D	4.90	5.10
E1	4.30	4.50
E	6.20	6.60
e	0.65	
L	0.45	0.75
L1	1.00	
θ	0°	8°




5.4、VQFN14

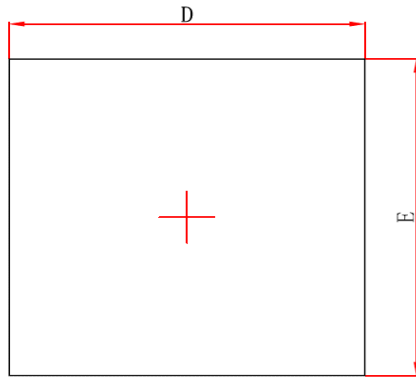

Top View

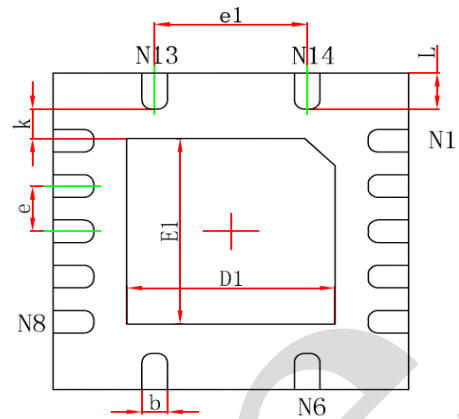

Bottom View

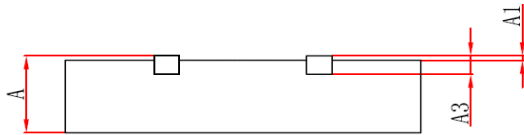


Side View

2024/08/A	Dimensions In Millimeters	
Symbol	Min	Max
A	0.70	0.90
A1	0	0.05
A3	0.203 REF	
D	3.424	3.576
E	3.424	3.576
D1	1.95	2.15
E1	1.95	2.15
k	0.20	—
b	0.20	0.30
e	0.50	
e1	1.50	
L	0.324	0.476



5.5、DHVQFN14

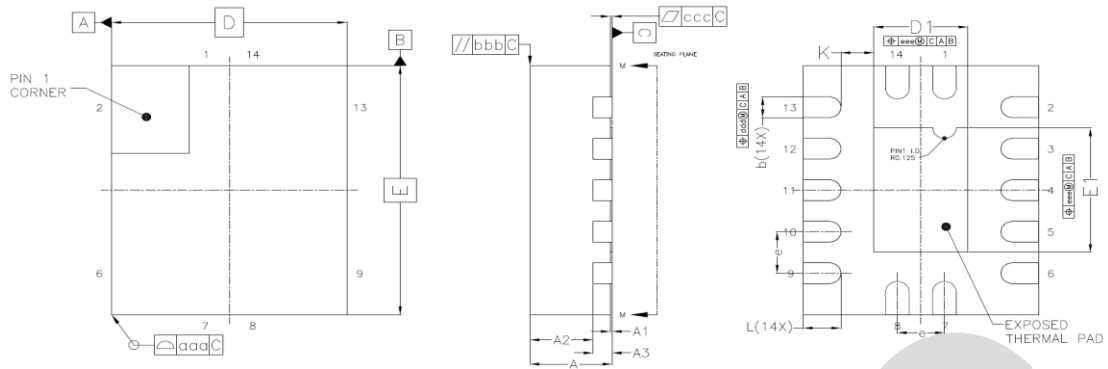

2024/10/A	Dimensions In Millimeters	
Symbol	Min	Max
A	0.80	1.00
A1	0	0.05
A2	0.60	0.70
A3	0.203 REF	
D	2.40	2.60
E	2.90	3.10
e	0.50	
b	0.18	0.30
L	0.30	0.50
D1	0.85	1.15
E1	1.35	1.65
K	0.35	



6、Statements And Notes

6.1、The name and content of Hazardous substances or Elements in the product

Part name	Hazardous substances or Elements									
	Lead and lead compounds	Mercury and mercury compounds	Cadmium and cadmium compounds	Hexavalent chromium compounds	Polybrominated biphenyls	Polybrominated biphenyl ethers	Dibutyl phthalate	Butylbenzyl phthalate	Di-2-ethylhexyl phthalate	Diisobutyl phthalate
Lead frame	○	○	○	○	○	○	○	○	○	○
Plastic resin	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
The lead	○	○	○	○	○	○	○	○	○	○
Plastic sheet installed	○	○	○	○	○	○	○	○	○	○
explanation	○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard. ×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.									

6.2、Notes

We recommend you to read this chapter carefully before using this product.

The information in this chapter is provided for reference only and i-Core disclaims any express or implied warranties, including but not limited to applicability, special application or non-infringement of third party rights.

This product is not suitable for critical equipment such as life-saving, life-sustaining or safety equipment. It is also not suitable for applications that may result in personal injury, death, or serious property or environmental damage due to product malfunction or failure. I-Core will not be liable for any damages incurred by the customers at their own risk for such applications.

The customer is responsible for conducting all necessary tests i-Core's application to avoid failure in the application or the application of the customer's third party users. I-Core does not accept any liability.

The Company reserves the right to change or improve the information published in this chapter at any time. The information in this chapter are subject to change without notice. We recommend the customer to consult our sales staff before purchasing.

Please obtain related materials from i-Core's regular channels and we are not responsible for its content if it is provided by sources other than our company.

In case of any conflict between the Chinese and English version, the version is subject to the Chinese one.